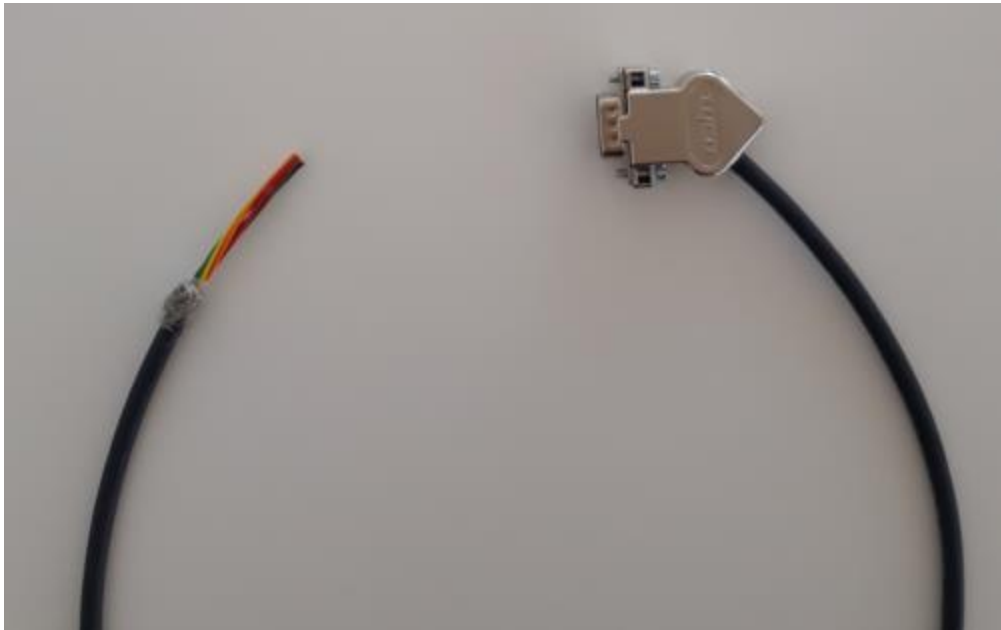

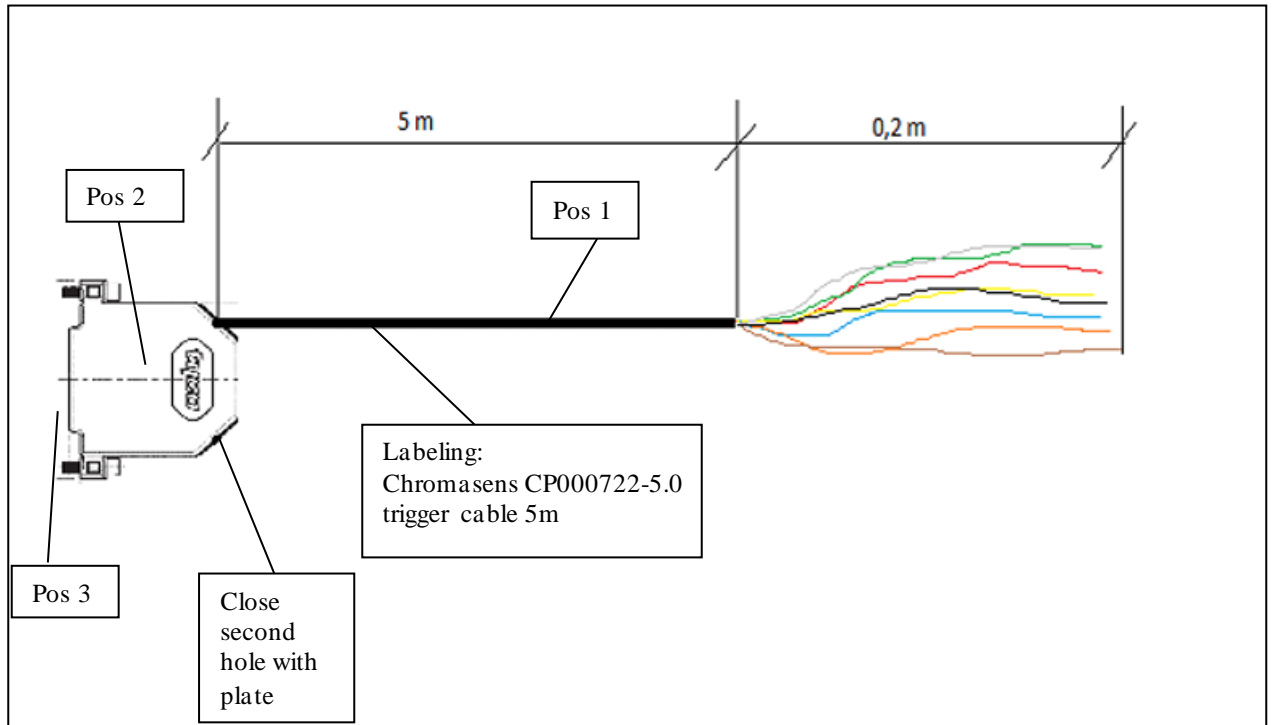


Technical data sheet

allPIXA neo Power and Trigger Cable – 5 m (CP000722-5.0)



				Date	Name	Technical data sheet Power and Trigger cable	
			Bea.	23.06.2023	C. Gönner		
			Prf.				
			Nor.			Document no.	Page 1
02		22.08.2023 M. Joggerst					2
01		23.06.2023 C. Gönner					
Rev	AE-Mitt.	Date	Name				TDS_CP000722-5.0-C_R02



Pin assignment trigger cabel for allPIXA neo (DIN 47100)

C.Gönner 23.06.2023

I/O 15 pin D-Sub HD allPIXA neo	Female (plug)	Cable
	Pin	Color of the wire (DIN 47100)
Line 1 + IN RS422 SE 3.3; 5; 12; 24V; out 3.3V	1	white
Line 1 - RS 422	2	brown
Line 2 + IN RS422 SE 3.3; 5; 12; 24V; out 3.3V	3	green
Line 2 - RS 422	4	yellow
Signal Ground (no PWR GND!)	5	grey
Line 3 + IN RS422 SE 3.3; 5; 12; 24V; out 3.3V	6	pink
Line 3 - RS422	7	blue
Line 4 + IN RS422 SE 3.3; 5; 12; 24V; out 3.3V	8	red
Line 4 - RS422	9	black
Power GND	10	purple
Line 5 + RS422 SE in 3,3V! ; out 3,3V	11	grey/pink
Line 5 - RS422 SE Line 7 in 3,3V! ; out 3,3V	12	red/ blue
Line 6 + RS422 SE in 3,3V! ; out 3,3V	13	white/ green
Line 6 - RS422 SE Line 8 in 3,3V! ; out 3,3V	14	brown/ green
Power VCC 12-24V DC	15	white/yellow

			Date	Name	Technical data sheet Power and Trigger cable
		Bea.	23.06.2023	C. Gönner	
		Prf.			
		Nor.			Document no.
02			22.08.2023	M.Joggerst	Page 2
01			23.06.2023	C.Gönner	2
Rev	AE-Mitt.		Date	Name	TDS_CP000722-5.0-C_R02

